


FOR BF 13" - 27", INNER RADIUS IS 32.50"
 FOR BF 27" - 39", INNER RADIUS IS 48"

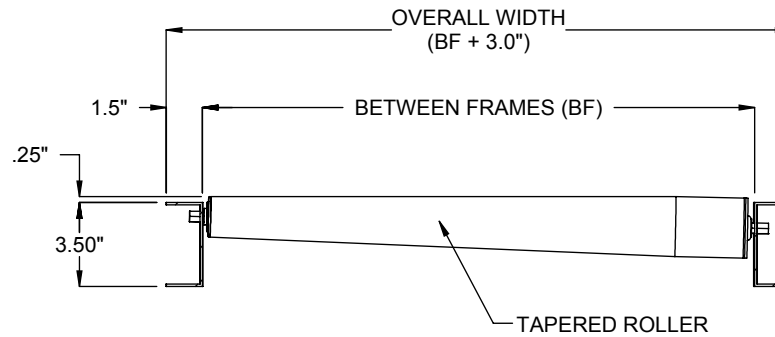

SECTION A-A

NOTE : FOR BF 27" AND LARGER, 90 DEGREE
 CURVE SHIPS AS (2) 45 DEGREE CURVES.
 SUPPORT AT SPLICE JOINT IS REQUIRED.

SPECIFICATIONS	
BETWEEN FRAMES: 13" - 39"	DEGREE: 90°, 45°, 30°
ROLLERS: 2.500" & 1.687" dia., 14ga wall tapered tube with 7/16" hex cold rolled steel axles.	
FRAMES: Standard FC42 Set high 3-1/2"x1-1/2"x12 ga, formed steel channel with bolted 2" x 8ga galvanized angle crossties.	
ROLLER SURFACE: <u>Optional</u> galvanized tube.	
COUPLINGS: Bolted butt couplers <u>Standard</u> on both ends of channel.	
FRAME FINISH: <u>Standard</u> finish is OSHA safety blue powder. <u>Optional</u> colors include green, beige, gray, orange, black and yellow.	

Model: 25TRC - Tapered Roller Curve