




**Enhanced Walk-In Oven, Rear Heater, 650 F, Fuel Fired, Horizontal Air Flow  
NFPA Class B**



Model	Workspace Dimensions			Heat Input	Circulating Blower (CFM)	Exhaust (ACFM)	Ships
	"W	"D	"H				
EWR06FH-48-48-60	48	- 48	- 60	200,000 BTUH	2000	100	Fully Assembled
EWR06FH-48-48-72	48	- 48	- 72	200,000 BTUH	2500	100	Fully Assembled
EWR06FH-48-48-96	48	- 48	- 96	200,000 BTUH	3500	100	Fully Assembled
EWR06FH-48-72-72	48	- 72	- 72	200,000 BTUH	4000	100	Fully Assembled
EWR06FH-48-72-96	48	- 72	- 96	200,000 BTUH	5000	100	Fully Assembled
EWR06FH-48-96-72	48	- 96	- 72	200,000 BTUH	5000	100	Fully Assembled
EWR06FH-48-96-96	48	- 96	- 96	400,000 BTUH	7000	100	Fully Assembled
EWR06FH-60-60-60	60	- 60	- 60	200,000 BTUH	3500	100	Fully Assembled
EWR06FH-60-60-72	60	- 60	- 72	200,000 BTUH	4000	100	Fully Assembled
EWR06FH-60-60-96	60	- 60	- 96	400,000 BTUH	5000	100	Fully Assembled
EWR06FH-60-72-72	60	- 72	- 72	200,000 BTUH	4500	100	Fully Assembled
EWR06FH-60-72-96	60	- 72	- 96	400,000 BTUH	6000	100	Fully Assembled
EWR06FH-60-96-96	60	- 96	- 96	400,000 BTUH	8000	250	Fully Assembled
EWR06FH-72-72-72	72	- 72	- 72	400,000 BTUH	5500	100	Fully Assembled
EWR06FH-72-72-96	72	- 72	- 96	400,000 BTUH	8000	100	Fully Assembled
EWR06FH-72-96-96	72	- 96	- 96	400,000 BTUH	10000	250	Fully Assembled

**Enhanced Walk-In Oven, Rear Heater, 650 F, Fuel Fired, Horizontal Air Flow  
NFPA Class A**

Model	Workspace Dimensions			Heat Input	Circulating Blower (CFM)	Exhaust (ACFM)	Max. Solvent (Gals. / Batch)	Ships
	"W	"D	"H					
EWR06FH-48-48-60	48	- 48	- 60	200,000 BTUH	2000	250	0.14	Fully Assembled
EWR06FH-48-48-72	48	- 48	- 72	200,000 BTUH	2500	250	0.14	Fully Assembled
EWR06FH-48-48-96	48	- 48	- 96	200,000 BTUH	3500	250	0.14	Fully Assembled
EWR06FH-48-72-72	48	- 72	- 72	200,000 BTUH	4000	250	0.14	Fully Assembled
EWR06FH-48-72-96	48	- 72	- 96	200,000 BTUH	5000	250	0.14	Fully Assembled
EWR06FH-48-96-72	48	- 96	- 72	200,000 BTUH	5000	250	0.14	Fully Assembled
EWR06FH-48-96-96	48	- 96	- 96	400,000 BTUH	7000	250	0.14	Fully Assembled
EWR06FH-60-60-60	60	- 60	- 60	200,000 BTUH	3500	250	0.14	Fully Assembled
EWR06FH-60-60-72	60	- 60	- 72	200,000 BTUH	4000	250	0.14	Fully Assembled
EWR06FH-60-60-96	60	- 60	- 96	400,000 BTUH	5000	250	0.14	Fully Assembled
EWR06FH-60-72-72	60	- 72	- 72	200,000 BTUH	4500	250	0.14	Fully Assembled
EWR06FH-60-72-96	60	- 72	- 96	400,000 BTUH	6000	250	0.14	Fully Assembled
EWR06FH-60-96-96	60	- 96	- 96	400,000 BTUH	8000	500	0.28	Fully Assembled
EWR06FH-72-72-72	72	- 72	- 72	400,000 BTUH	5500	250	0.14	Fully Assembled
EWR06FH-72-72-96	72	- 72	- 96	400,000 BTUH	8000	250	0.14	Fully Assembled
EWR06FH-72-96-96	72	- 96	- 96	400,000 BTUH	10000	500	0.28	Fully Assembled

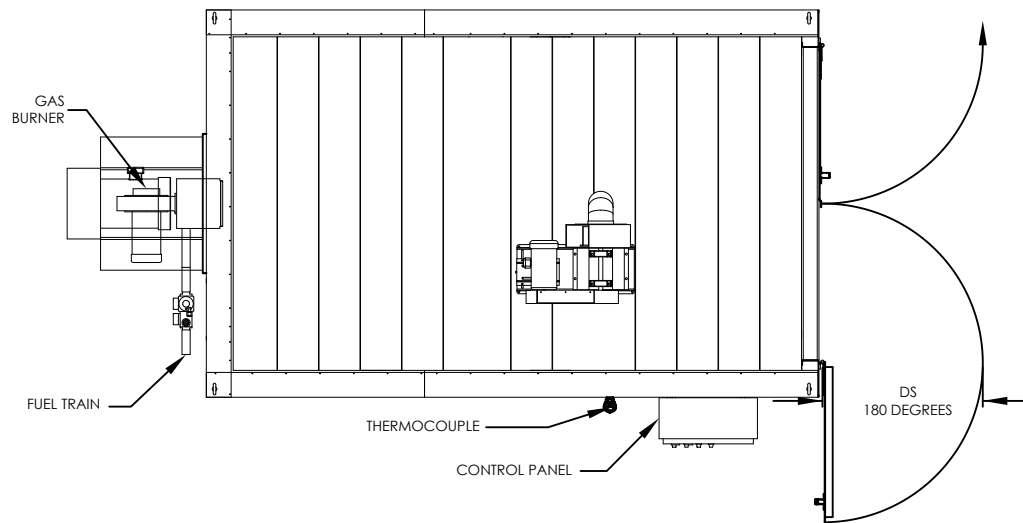

MODEL	WORKSPACE DIMENSIONS				OVERALL DIMENSIONS		
	IW (in)	ID (in)	IH (in)	DS (in)	OAW (in)	OAD (in)	OAH (in)
EWRO6FH-48-48-60	48	48	60	34	79	106	87
EWRO6FH-48-48-72	48	48	72	34	79	106	99
EWRO6FH-48-48-96	48	48	96	34	79	110	123
EWRO6FH-48-72-72	48	72	72	34	79	140	99
EWRO6FH-48-72-96	48	72	96	34	79	140	123
EWRO6FH-48-96-72	48	96	72	34	79	164	99
EWRO6FH-48-96-96	48	96	96	34	79	170	123
EWRO6FH-60-60-60	60	60	60	40	91	122	87
EWRO6FH-60-60-72	60	60	72	40	91	128	99
EWRO6FH-60-60-96	60	60	96	40	91	128	123
EWRO6FH-60-72-72	60	72	72	40	91	140	99
EWRO6FH-60-72-96	60	72	96	40	91	146	123
EWRO6FH-60-96-96	60	96	96	40	91	170	123
EWRO6FH-72-72-72	72	72	72	46	103	146	99
EWRO6FH-72-72-96	72	72	96	46	103	146	123
EWRO6FH-72-96-96	72	96	96	46	105	178	123

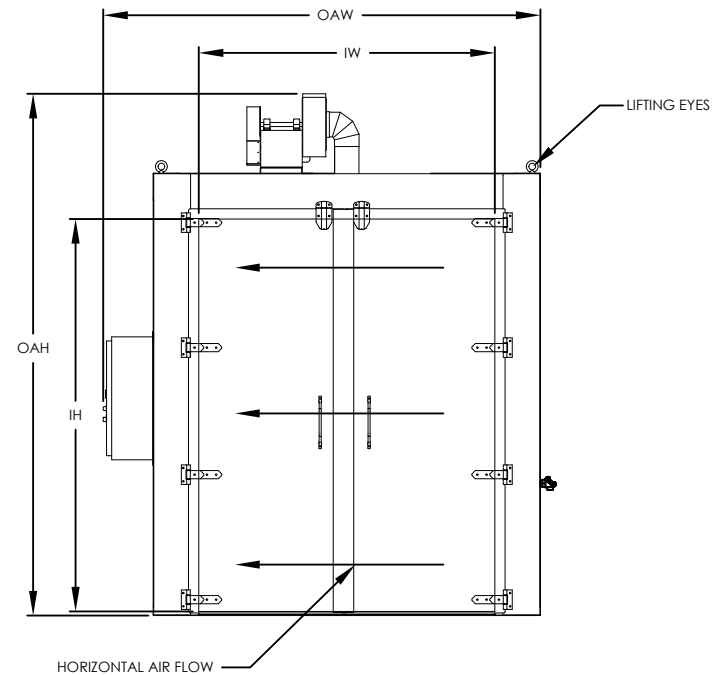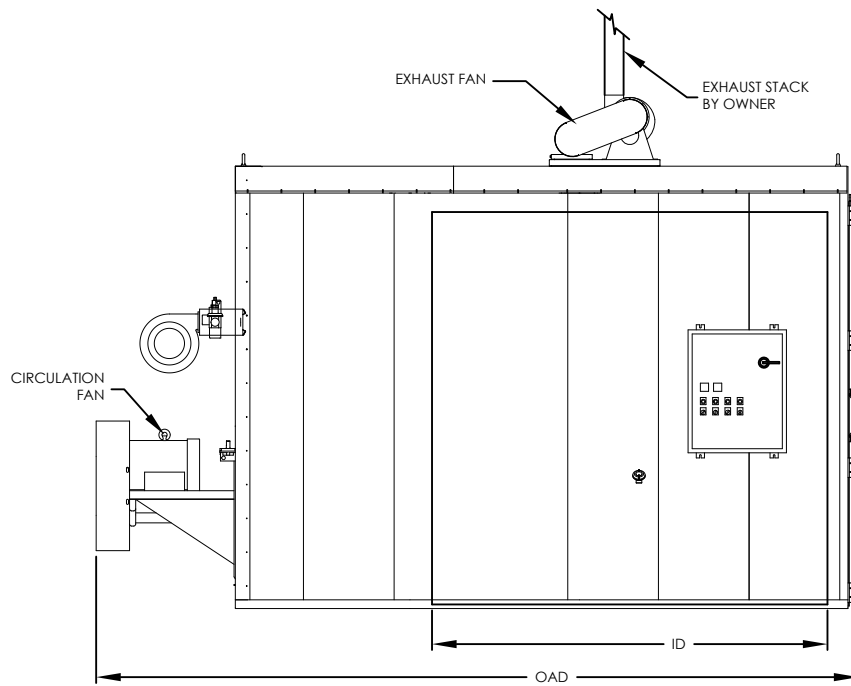

THE NATIONAL FIRE PROTECTION ASSOCIATION'S STANDARD NFPA 86 DOCUMENTS GUIDELINES FOR THE SAFE OPERATION OF OVENS AND FURNACES. THIS STANDARD DEFINES AN OVEN OCCASIONED BY THE PRESENCE OF FLAMMABLE VOLATILES OR COMBUSTIBLE MATERIAL AS "CLASS A" AND FURTHER MANDATES SPECIFIC SAFETY EQUIPMENT ON THESE OVENS TO REDUCE THE RISK OF FIRE OR EXPLOSION. SIMILARLY, OVENS OR FURNACES WHEREIN NO FLAMMABLE VOLATILES OR COMBUSTIBLE MATERIALS ARE PRESENT ARE CONSIDERED "CLASS B". IT IS IMPERATIVE THAT THE USER OF HEAT PROCESSING EQUIPMENT BE KNOWLEDGEABLE REGARDING APPLICATION OF THE EQUIPMENT.

MODEL: EWR06FH  
 DESCRIPTION: Enhanced Walk-In Oven, Rear Heater, 650 F, Gas, Horizontal Air Flow  
 DRAWING: EWR06FH SALES

LEWCO, INC. IS COMMITTED TO CONTINUOUS IMPROVEMENT AND RESERVES THE RIGHT TO CHANGE DESIGNS AND SPECIFICATIONS WITHOUT NOTICE.  
 THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED, REPRODUCED OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF LEWCO, INC. ALL RIGHTS RESERVED.

DATE 4/30/2014  
 REV 001  
 PAGE 1 OF 1

