



BRAKE - DOWN POSITION

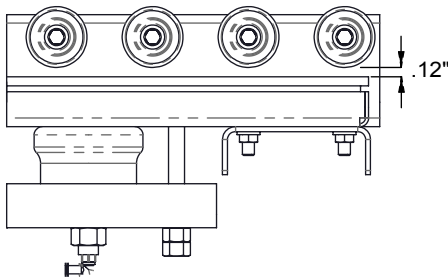

BRAKE - UP POSITION

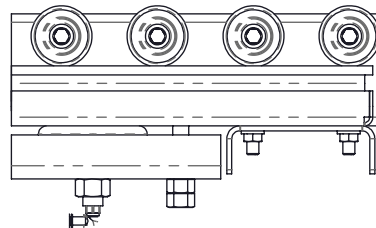

SPECIFICATIONS

OVERALL WIDTH: 10" - 66"

FRAME DEPTH: 3.5", 4"

LENGTH: 24", 36", 48"

ROLLERS: Standard assembly is mounted to 1.9" diameter roller conveyor. Optional configuration mounts to 2.5" diameter roller conveyor with shim pack.

MOUNTING: Escapement frame bolts on to bottom flange of conveyor frame.

OPERATION: Inflating the air bag disengages the escapement stop.

AIR SPRING: (2) 3-1/2" dia. air springs, plumbed with 1/4" nylon tubing to tee fitting.

AIR REQUIREMENTS: Standard requires 30-40psi of clean, filtered, regulated air at consumption of approximately 0.005 cubic feet per cycle. Optional valve and filter/regulator/lubricator available.

FINISH: Standard finish is OSHA safety orange powder.

Model: RBB - Escapement Stop, Roller Brake, Air Operated

REV
0

